



COMBiLiFT

Customised Handling Solutions


C14,000

making short work of long loads



three machines in one
counterbalance forklift > aisle truck > side loader

www.COMBiLiFT.com

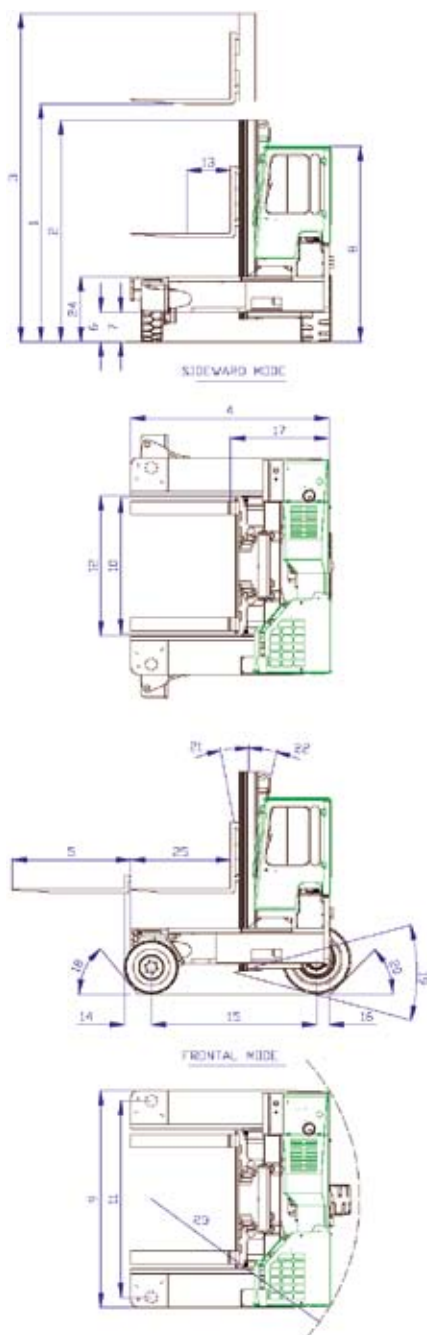

REF	DESCRIPTION	C14,000
1a	Max. Lift Height	4100mm
1b	Free Lift Height	0mm
2	Height Mast Closed	3450mm
3	Max.(Mast raised)	5750mm
4	Overall Length	2990mm
5	Mast Travel	1584mm
6	Ground Clearance Under Mast	305mm
7	Ground Clearance to Center of Wheelbase	330mm
8	Height Of Cab (without work-lights)	2950mm
9	Width	3260mm
10	Outside Spread of Fork Arms	2000mm
11	Track Front	2940mm
12	Frame Opening	2180mm
13	Load Center Distance	600mm
14	Overhang Front	400mm
15	Wheel Base	2474mm
16	Overhang Back	210mm
17	Length From Face of Fork	1500mm
18	Approach Angle	45°
19	Ramp Angle	29°
20	Departure Angle	45°
21	Forward Tilt	4°
22	Backward Tilt	8°
23	Minimum Outside Radius	3160mm
24	Platform Height	980mm
25	Platform Length	1490mm
A	Capacity	14,000 kg
B	Unladen Weight	15,000 kg
C	Maximum Ground Speed	19 km/h
D	Gradability	15%
E	Kubota V3800 TE Diesel / 4.3ltr GM LPG	72kW(96hp) / 72kW (96hp)
F	Electric's	12 Volt
G	Fork Section	65mm x 200mm x 1490mm
H	400/60-15 Front Tire (Super Elastic) x 2	OD 825mm / Width 326mm
I	465/55-20 Rear Tire (Super Elastic) x 1	OD 1016mm / Width 457mm
J	Standard Color	Green and Grey
K	Suspension Seat	KAB Model 21 I

FEATURES INCLUDE:

- Multi – Direction Operation
- 3 Wheel Hydrostatic Drive
- Load Sensing Steering
- 4 way lever Positioning of Wheels
- Hydraulic Oil Cooler
- Rubber Mounted Cabin

Compare the options

	Outside	Inside	4-Way
COMBiLiFT	✓	✓	✓
4-Way Electric	x	✓	✓
Counterbalance	✓	✓	x
Side Loader	✓	x	x

COMBiLiFT Ltd

Co.Monaghan
Ireland

Tel: ++ 353 47 80500

Fax: ++ 353 47 80501

info@combilift.com

www.COMBiLiFT.COM

Distributed By