



COMBiLiFT

Customised Handling Solutions

C2500 – C3000

making short work of long loads



forward/reverse mode



carousel mode



sideward mode



three machines in one


- counterbalance forklift - sideloader - aisle truck

www.COMBiLiFT.COM



SPECIFICATIONS

Models C2500 - C3000

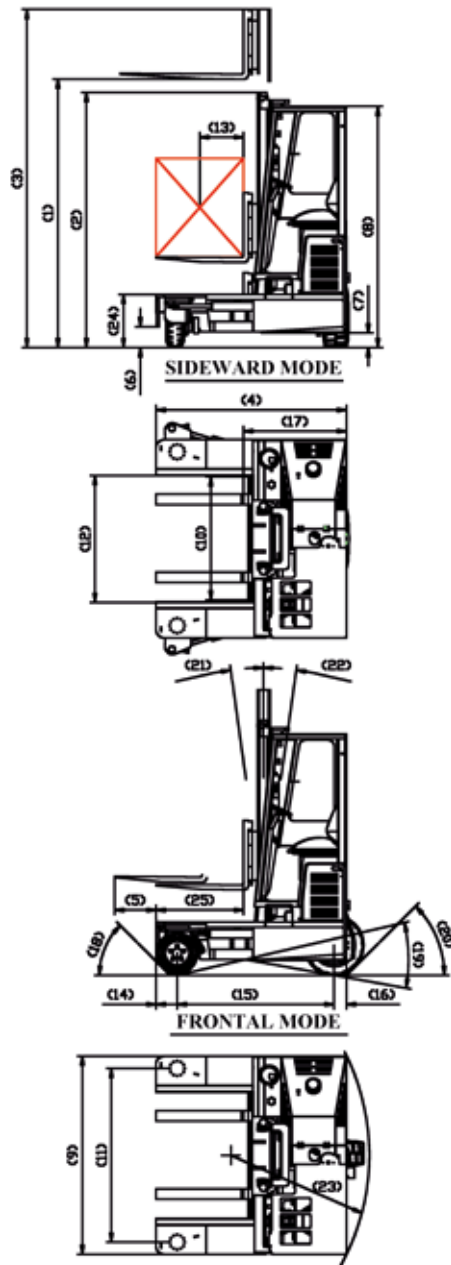

REF	DESCRIPTION	C2500	C3000
1a	Max. Lift Height		4040mm
1b	Free Lift Height		0mm
2	Height Mast Closed		2655mm
3	Max.(Mast raised)		4760mm
4	Overall Length	1900mm	2250mm
5	Mast Travel	850mm	1200mm
6	Ground Clearance Under Mast		150mm
7	Ground Clearance to Centre of Wheelbase		135mm
8	Height Over Cab		2345mm
9	Width		1930mm
10	Outside Spread of Fork Arms		1200mm
11	Track Front		1730mm
12	Frame Opening		1230mm
13	Load Centre Distance	450mm	600mm
14	Overhang Front		205mm
15	Wheel Base	1528mm	1878mm
16	Overhang Back		167mm
17	Length From Face of Fork		1100mm
18	Approach Angle		45°
19	Ramp Angle		17°
20	Departure Angle		45°
21	Forward Tilt		2°
22	Backward Tilt		4°
23	Minimum Outside Radius	1850mm	2200mm
24	Platform Height		495mm
25	Platform Length	800mm	1150mm
A	Capacity	2500Kg	3000Kg
B	Unladen Weight 10,350 lbs	4700Kg	4900Kg
C	Maximum Ground Speed		14 km/h
D	Gradability		10%
E	Kubota Diesel / VW Engine (LPG)	32kW / 48.5kw	
F	Electric's		12 Volt
G	Fork Section 45 x 150 x	800mm	1150mm
H	16 x 7 - 10.5 Front Tyre (Solid)		406 x 178mm
I	23 x 10 - 12 Rear Tyre (Super Elastic)		580 x 240mm
J	Standard Colour		Green & Grey
K	Suspension Seat		KAB Model 211

FEATURES INCLUDE:

- Rubber Mounted Half Cabin with Top, Front, Side and Rear Glass
- Multi - Direction Operation
- 3 Wheel Hydrostatic Drive
- Load Sensing Steering
- 4 Way lever Positioning of Wheels

Distributed By

COMBiLiFT Ltd
Co.Monaghan
Ireland
Tel: ++ 353 47 80500
Fax: ++ 353 47 80501
info@combilift.com

www.COMBiLiFT.COM