





COMBiLiFT

Customised Handling Solutions

C5000 SL

making short work of long loads

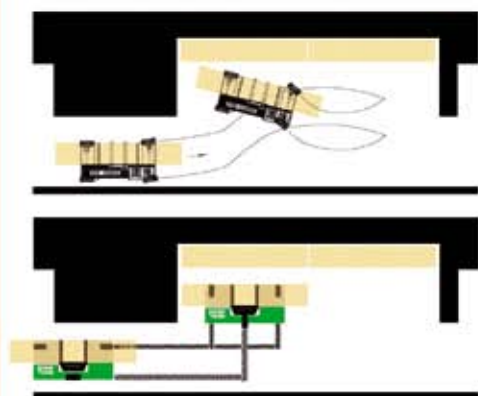

Carousel Mode




two machines in one

> counterbalance forklift > sideloader > aisle truck





SPECIFICATIONS


Model C5000 SL

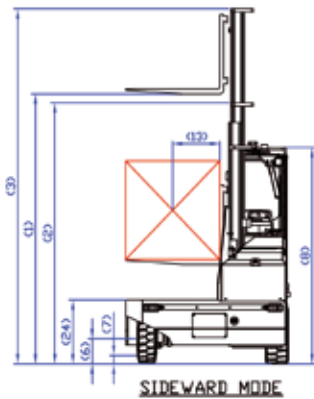

SIDEWARD MODE

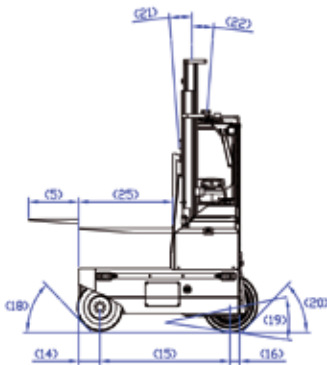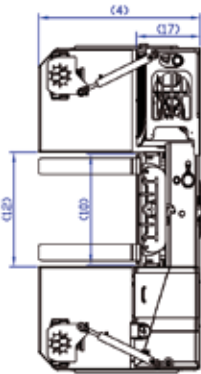

FRONTAL MODE

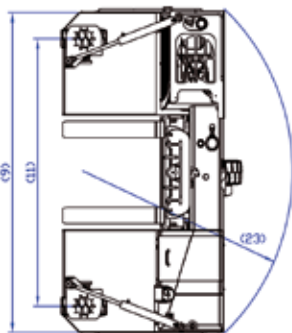

REF	DESCRIPTION	C4500SL	C5000SL	C6000SL
1 a	Max. Lift Height		4040mm	
1 b	Free Lift Height		0mm	
2	Height Mast Closed		3000mm	
3	Max. (Mast raised)		5200mm	
4	Overall Length	2050mm	2050mm	2250mm
5	Mast Travel	1300mm	1300mm	1500mm
6	Ground Clearance Under Mast		300mm	
7	Ground Clearance to Wheelbase Centre		185mm	
8	Height Over Cab or of Overhead Guard		2570mm	
9	Width		3900mm	
10	Outside Spread of Fork Arms		1350mm	
11	Track Front		3258mm	
12	Frame Opening		1400mm	
13	Load Centre Distance		600mm	
14	Overhang Front		272mm	
15	Wheel Base	1658mm	1858mm	1858mm
16	Overhang Back		121mm	
17	Length From Face of Fork		850mm	
18	Approach Angle		45°	
19	Ramp Angle		18°	
20	Departure Angle		45°	
21	Forward Tilt		3°	
22	Backward Tilt		5°	
23	Minimum Outside Radius		2590mm	
24	Platform Height		750mm	
25	Platform Length	1200mm	1400mm	1400mm
A	Capacity	4500Kg	5000Kg	6000Kg
B	Unladen Weight	9500Kg	9800Kg	9200Kg
C	Maximum Ground Speed		20 km/h	
D	Gradability	15%	15%	15%
E	V3300-TE Kubota Diesel/4.3Ltr GMLPGas		62 kW / 72kW	
F	Electric's		12 Volt	
G	Fork Section 50 x 200 x	1200mm	1200mm	1400mm
H	23 x 10 - 12 Front Tyre		OD 580mm/Width 240mm	
I	28 x 12.5 - 15 Rear Tyre		OD 720mm/Width 295mm	
J	Standard Colour		Green and Grey	
K	Suspension Seat		KAB Model 116	

FEATURES INCLUDE:

- Rubber Mounted Half Open Cabin
- Multi-Direction Operation
- 3 Wheel Hydrostatic Drive
- Load Sensing Steering
- 4 Way lever Positioning of Wheels
- Hydraulic Oil Cooler

Distributed By

www.COMBiLiFT.COM

Combilift Ltd., Co. Monaghan, Ireland **Tel:** +353 47 80500 **Fax:** +353 47 80501 **info@combilift.com**

COMBiLiFT has a policy of continuous product development and reserves the right to alter specifications without prior notice. Specifications and / or dimensions may vary from those illustrated in some countries.