

Technical sheet :

MLA 7-75 H-2






| Capacities | | Metric |
|--|-----|-----------------------------------|
| Static tipping load with bucket (straight) | | 3378 kg |
| Static tipping load with bucket (full turn) | | 2621 kg |
| Static tipping load with forks (straight) | | 2741 kg |
| Static tipping load with forks (full turn) | | 2174 kg |
| Max. height of bucket pivot point | h35 | 3.47 m |
| Max. lifting height (below forks) | h3 | 3.28 m |
| Breakout force with bucket | | 5906 daN |
| Weight and dimensions | | |
| Unladen weight (with forks) with 4-post canopy | | 4781 kg |
| Unladen weight (with forks) | | 4953 kg |
| Overall length to carriage (without hitch) | l3 | 4.44 m |
| Wheelbase | y | 2.06 m |
| Overall width of 4 posts canopy | b22 | 1.28 m |
| Overall cab width | b4 | 1.28 m |
| Overall width (over tyres) | b1 | 1.74 m |
| Overall height with FOPS removed and ROPS folded | h36 | 1.99 m |
| Overall height with 4 posts canopy | h38 | 2.48 m |
| Overall height with cab | h17 | 2.48 m |
| Tilt-up angle | a4 | 45 ° |
| Tilt-down angle | a5 | 45 ° |
| Articulation angle | | 45 ° |
| Ground clearance | m4 | 0.31 m |
| Engine | | |
| Engine brand | | Deutz |
| Engine model | | TD_3_6_L4 |
| Environmental norm | | Stage 3B |
| Number of cylinders / Capacity of cylinders | | 4 - 3600 cm ³ |
| I.C. Engine power rating / Power (kW) | | 74.30 Hp / 55.40 kW |
| Max. torque / Engine rotation | | 330 Nm / 1600 rpm |
| Engine cooling system | | 2 radiators water + hydraulic oil |
| Transmission | | |
| Transmission type | | Hydrostatic |
| Number of gears (forward / reverse) | | 2 / 2 |
| Max. travel speed (may vary according to applicable regulations) | | 30 km/h |
| Travel speed (laden) | | 20 km/h |
| Differential lock | | Machine Lock Rear & front |
| Parking brake | | Manual |
| Hydraulics | | |
| Hydraulic pump type | | Gear pump |
| Hydraulic flow - Pressure | | 70 l/min / 200 Bar |
| High-Flow Option (l/min) | | 110 l/min |
| Drive hydraulic system pressure | | 380 Bar |
| Tank capacities | | |
| Hydraulic oil | | 74 l |
| Fuel tank | | 102 l |
| Noise and vibration | | |
| Vibration to whole hand/arm | | < 2.50 m/s ² |
| Miscellaneous | | |
| Safety cab homologation | | ROPS - FOPS cab (level 1) |

Options / Finishing

S : Standard / O : Optional / - : Not available

| | Essential | Classic | Premium |
|---|-----------|---------|---------|
| Lifting function | | | |
| Boom suspension | O | O | S |
| Hydraulic attachment locking | S | S | S |
| Operator station | | | |
| Adjustable and telescopic steering column | S | S | S |
| Air conditioning with manual adjustment | - | O | - |
| Air pre-filter | S | S | S |
| Air suspension seat | - | O | S |
| Canopy | S | - | - |
| Closed cab with heating | - | S | S |
| Floor mat | S | S | S |
| Manual air conditioning | - | - | S |
| Mechanical cloth seat (KAB) | S | S | - |
| Tuner car radio (50 W) | - | S | S |
| Motorization/Power | | | |
| Attachment hydraulic line | S | S | S |
| Continuous flow hydraulics | S | S | S |
| Hand throttle | S | S | S |
| Speed control | O | O | S |
| Third speed | O | O | S |
| Lighting | | | |
| Complete road lighting | O | S | S |
| Flat Led Rotating Beacon | O | O | O |
| Front and rear LED work lights on cab (x4 : 2 front + 2 rear) | S/O** | O | S |
| Front and rear work lights on cab (x4: 2 front + 2 rear) | S | S | - |

MLA 7-75 H-Z - Dimensional drawing

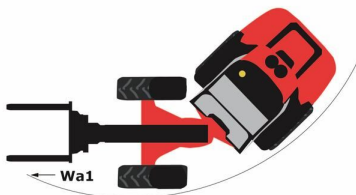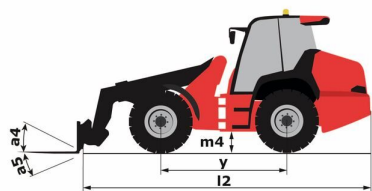



Siège Social

430 rue de l'Aubinière - 44150 Ancenis Cedex - France

Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

www.manitou.com



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes